

Product Info

OAB-1

Introduction



The OAB-1 Office Alarm Box provides an audible and visible signal when an alarm is generated by your Danfoss environment control system. When an alarm occurs, the red LED on the OAB-1 turns on and a pulsing beep is sounded. A momentary contact switch mounted on the OAB-1 acts to silence the alarm but the red LED remains lit as long as the alarm condition persists.

The OAB-1 is compatible with all Danfoss AK255 controllers as well as legacy controllers (AKC55, NC-25).

Specifications

Size:	4 3/4" x 4 3/4" x 1 7/8" Standard wiremold enclosure
Cable :	Requires 6 conductor, 18AWG, stranded, shielded cable
Power requirements:	12 VAC @ 500 milliamps supplied by the controller Dry contact rating: 15A (125/250/277)
Operating environment:	Ambient Temperature: -5°F to 160°F (-20°C to 70°C) Humidity: 0% to 95 % RH, non-condensing




Installation and Inspection


Typically, the OAB-1 is mounted in a manager's office or at the sales floor courtesy desk. It is not a node on the I/O network; it is activated by and must be wired to an available relay point on the relay output module.

To connect the OAB-1 to your Danfoss control system, use #18 AWG stranded wire from the two screw terminals labeled "Alarm In" to the NO and C terminals of an available relay output on the relay module.

Connect 12 VAC from a Danfoss power supply to the designated terminal strip on the board inside the OAB as shown at the left bottom in the wiring diagram.

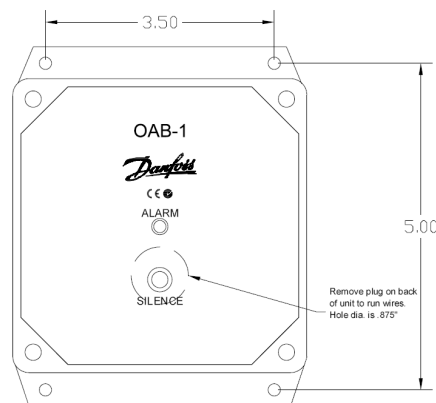

OAB-1 WIRING DETAILS



12-15 VAC from Danfoss power source type IOPS

Wire to C. and N.O. terminals of an AK2 Relay module attached to an AK2-SC255

Optional reset monitor Wire to digital input

Ordering

	Danfoss Inc. ELECTRONIC DIVISION Baltimore, MD
Part #: OAB-1	
Office Alarm Box PC Board w/audio, LED signal & reset	

www.danfoss.us

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.